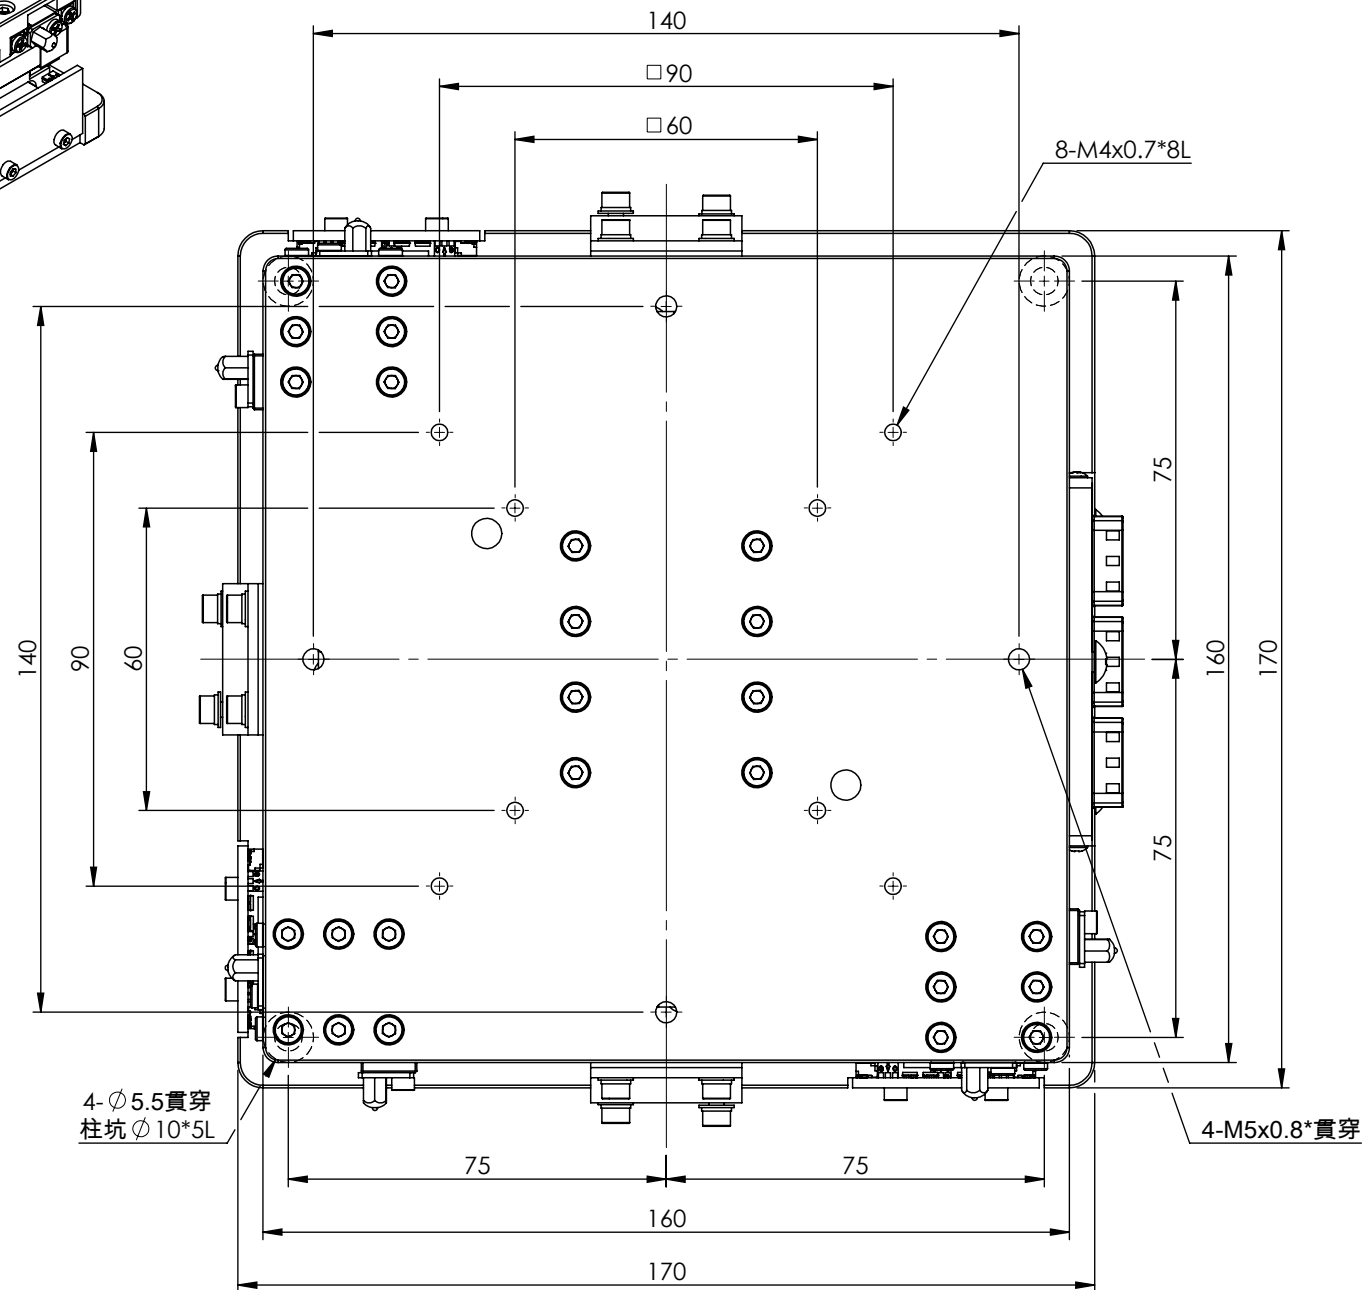
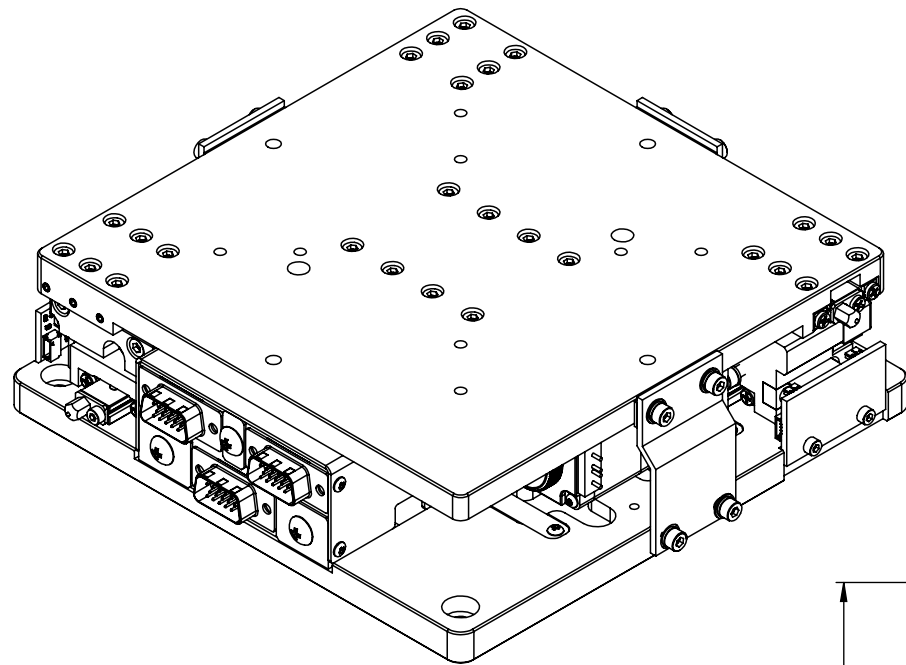



					XXY對位平台-進給量計算參數表									
					R(mm)	$\theta X1^\circ$	$\theta X2^\circ$	θY°	座標					
					91.2168	135	315	225	X1(-64.5, 64.5) X2(64.5, -64.5) Y (-64.5, -64.5)					
成品檢驗精度					螺桿導程(mm)		$\phi 6\text{-P1}$			(FM0755A)				
平行度	反覆定位精度	滑台移動行程	動態負荷	靜態負荷										
30 μm	$\pm 5\mu\text{m}$	$\pm 3\text{mm}^* \pm 2^\circ$	30Kg	60Kg										
一般公差		精加工: 	審核	日期	備註事項		精密級:2相步進		機種	GAS00-160LC				
尺寸範圍	容許差	細加工: 	繪圖	日期	表面處理		依各零件		料號	332B-GAS00-160LC-PN-00-T1				
0.5 ~ 4	± 0.05	粗加工: 	設計	日期	2023/6/16		材質	本體鋁/鋼 數量 1 /組		圖名	XXY對位平台-輕載160型			
4 ~ 16	± 0.07	熱情 / 團結 / 創新 / 卓越 Http://www.gmtglobalinc.com  高明鐵企業股份有限公司 GMT GLOBAL INC. TEL: 886-4-7688327 FAX: 886-4-7688302			熱處理				圖號	GAS00-160LC-PN				
16 ~ 68	± 0.1				單位	mm	圖紙尺寸	A3	投 影		版次	T1		
68 ~ 250	± 0.2				比例	1:1.5	重量	4327.5g						
250 ~ 1000	± 0.3													
1000 ~ 1500	± 0.5													